

USB Connector

SPECIFICATIONS

Mechanical

Mating Force: 3.50Kg (7.71Lb) max.
Unmating Force: 1.00Kg (2.20Lb) min.
Durability: 1500 Cycles


Electrical

Current Rating: 1.5A
Contact Resistance: 30mΩ max.
Dielectric Withstanding Voltage: 500V AC/1min min.
Insulation Resistance: 1000MΩ min.


Physical

Housing: Thermoplastic, UL 94V-0 rated
Contact: Copper alloy
Shell: Stainless steel
Plating: See "ORDERING INFORMATION"
Operating Temperature: -55°C to +85°C

UB Series
Up Right, T/H
4 Pos.



DRAWING

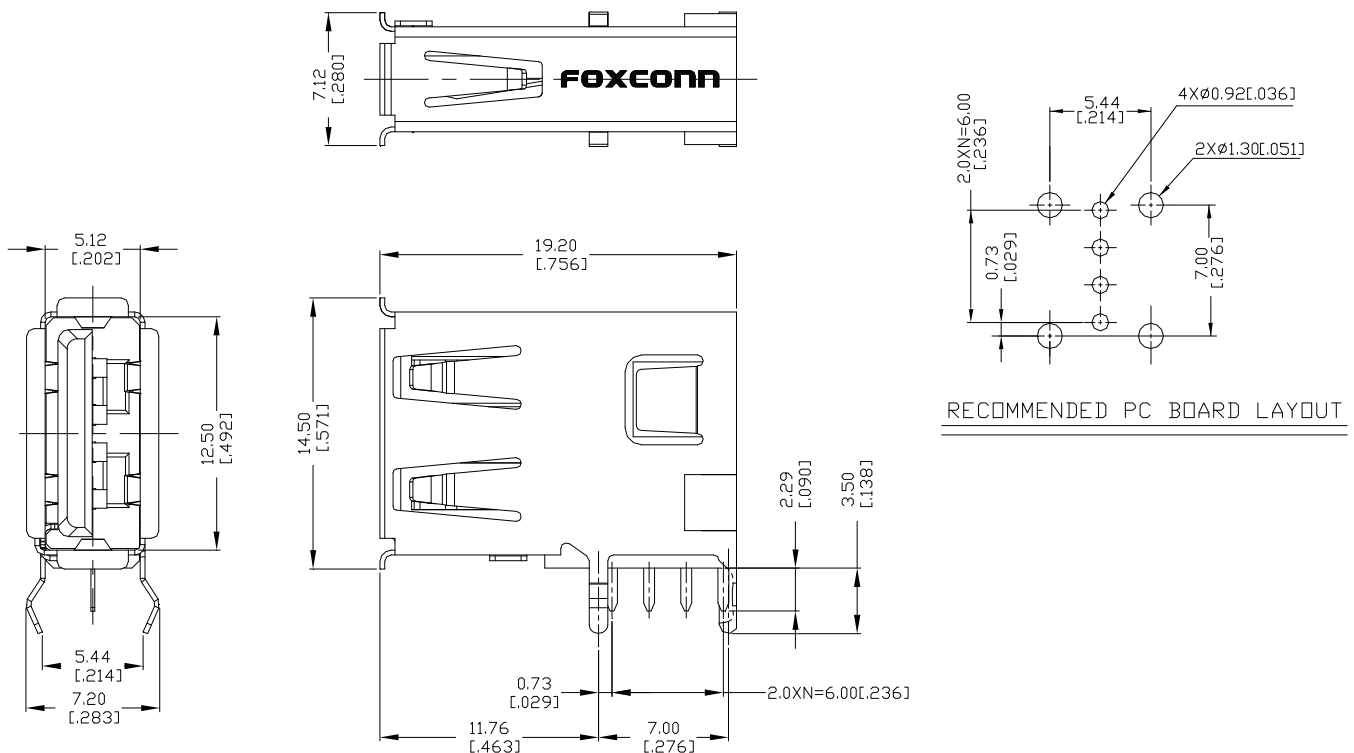

ORDERING INFORMATION

PRODUCT NO: UB 3 1 1 9 C - 4SK8 - 4 F

- | | | | | | | | | |
|-------------|-----------------|---------------------|----------------|-------------------------|--------------|----------------|----------------------|----------------|
| USB Series | Terminator Type | Contact Design Type | NO. of Pos | Lead Free | Package Code | Extension Code | Contact Area Plating | Profile Height |
| 3= UP RIGHT | 1=Female | 1=4 Pos | 4=Tray Packing | C=30u" Pd/Ni+Gold Flash | | | | |